

WP-275DS

HORIZONTAL METAL CUTTING BAND SAW

* Study Carefully Before Operating



Specifications

Capacity:

			
90°	227mm	220 x 220mm	260 x 110mm
45°	150mm	145 x 145mm	200 x 125mm
60°	90mm	85 x 85mm	
45°(L)	110mm	110 x 110mm	160 x 110mm

Blade Size

27 x 0.9 x 2460mm

Blade Speed

50Hz 4P 72m/min 8P 36m/min

Motor

1.5HP (1.1kW) 4P 1430RPM

Packing Size (L x W x H)

1549 x 737 x 1045mm

Container Loads

22 sets per 20 feet

NW: 315kgs GW: 360kgs

Contents

Chapter 1

ACCIDENT PREVENTION AND SAFETY REGULATION

1.1 Advice for the Operator	2
1.2 The Electrical Equipment According to European Standard" CENELEC EN 60204-1".....	2
1.3 Emergencies According to European Standard "CENELEC EN 60204-1"	2

Chapter 2

MACHINE DIMENSIONS TRANSPORT INSTALLATION DISMANTLING

2.1 Machine Dimensions	2
2.2 Transportation of Your Machine	3
2.3 Minimum Requirements for Housing the Machine	3
2.4 Anchoring the Machine	3
2.5 Instructions for Assembly of the Loose Parts and Accessories	3
2.6 Deactivation of Machine	3
2.7 Dismantling	3

Chapter 3

THE MACHINE'S FUNCTIONAL PARTS

3.1 The Saw Bow	3
3.2 Controls	4
3.3 Vise Adjustment.....	4
3.4 Cutting Angle Adjustment	4
3.5 The Base	4

Chapter 4

OPERATING AND ADVICE ON USING YOUR BANDSAW

4.1 The Operation Cycle.....	4
4.2 Recommendations for Using the Machine	5

Chapter 5

ADJUSTING YOUR MACHINE

5.1 Blade Tension Assembly	6
5.2 Aligning the Flywheel.....	6
5.3 Checking the Adjustment of the Blade	7
5.4 Adjusting the Blade Guide	7
5.5 Changing the Blade	7

Chapter 6

ROUTINE AND SPECIAL MAINTENANCE

6.1 Daily Maintenance	8
6.2 Weekly Maintenance	8
6.3 Monthly Maintenance.....	8
6.4 Six-monthly Maintenance	8
6.5 Oils for Lubricating Coolant	8
6.6 Oil Disposal.....	8
6.7 Coolant System	8
6.8 The Gearbox.....	8
6.9 Special Maintenance	9

Chapter 7

TECHNICAL CHARACTERISTICS

7.1 Table of Cutting Capacity and Technical Details	9
---	---

Chapter 8

MATERIAL CLASSIFICATION AND CHOICE OF TOOL

8.1 Definition of Materials	10
8.2 Selecting Blade	10
8.3 Teeth Pitch.....	10
8.4 Cutting and Advance Speed.....	10
8.5 Blade Running-in	10
8.6 Blade Structure	10
8.7 Blade Type.....	10

Chapter 9

NOISE TESTS	11
-------------------	----

Chapter 10

WIRING DIAGRAM	12
----------------------	----

Chapter 11

TROUBLESHOOTING

11.1 - Blade and Cut Diagnosis.....	13
-------------------------------------	----

Chapter 12

MACHINE COMPONENTS

12.1 Parts List	17
12.2 Explosion Drawings	20

1 ACCIDENT PREVENTION AND SAFETY REGULATION

This machine has been designed to comply with national and community accident-prevention regulations. Improper use and/or tampering with the safety devices will relieve the manufacturer of all responsibility.

1.1 Advice for the Operator

- Check that the voltage indicated on machine motor is the same as the line voltage.
- Check the efficiency of your electric supply and grounding system; connect the power cable of the machine to the socket and the ground lead (yellow-green in color) to the grounding system.
- When the saw frame is in suspended mode (or raised) the blade must not move.
- Only the blade section used for cutting must be kept unprotected. To adjust the blade guards use on the blade guides.
- It is forbidden to use the machine without its shields
- Always disconnect the machine from the power socket before blade change or carrying out any maintenance job, even in the case of abnormal machine operation.
- Always wear suitable eyes protection.
- Never put your hands or arms into the cutting area while the machine is operating.
- Do not shift the machine while it is cutting.
- Do not wear loose clothing like: shirts with sleeves that are too long, gloves that are too big, bracelets, chains or any other object that could get caught in the machine during operation. Tie back long hair.
- Keep the area free of equipment, tools, or any other object.
- Perform only one operation at a time. Never have several objects in your hands at the same time. Keep your hands as clean as possible.
- All internal operations, maintenance or repairs, must be performed in a well-lit area or where there is sufficient light from extra sources so as to avoid the risk of even slight accidents

1.2 The electrical equipment according to European Standard" CENELEC EN 60204-1"

- The electrical equipment ensures protection against electric shock as a result of direct or indirect contact. The active parts of this equipment are housed in a box to which access is limited by screws that can only be removed with a special tool; the parts are fed with alternating current as low voltage (24V). The equipment is protected against splashes of water and dust.
- Protection of the system against short circuits is ensured by means of rapid fuses and grounding; in the event of a motor overload, protection is provided by a thermal probe.
- In the event of a power cut, the specific start-up button must be reset.
- The machine has been tested in conformity with point 20 of EN 60204



1.3 Emergencies according to European Standard "CENELEC EN 60204-1"

- In the event of incorrect operation or of danger conditions, the machine may be stopped immediately by pressing the red mushroom button.
- The casual or voluntary removal of the protection shield of the flywheels causes the stepping-in of a micro-switch that automatically stops all machine functions.


NOTE: Resetting of machine operation after each emergency stop requires specific restart button.

2 MACHINE DIMENSIONS TRANSPORT INSTALLATION DISMANTLING

2.1 Machine Dimensions

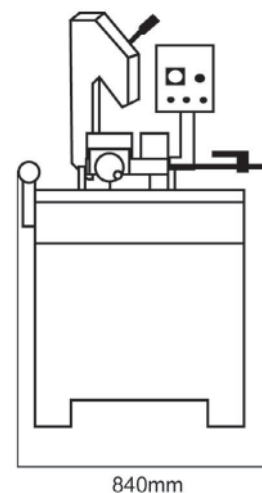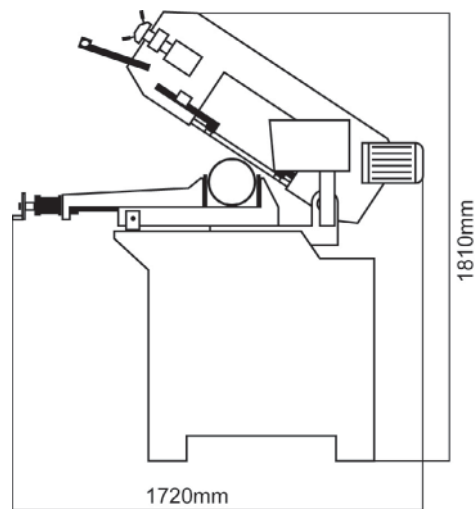

2.2 Transportation of Your Machine

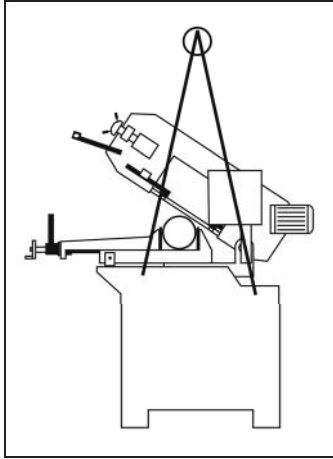


To move the machine, the machine needs to be moved in its own packing, use a forklift truck or sling it with straps as illustrated in the drawing above.

2.3 Minimum Requirements for Housing the Machine

- Main voltage and frequency must comply with the machine's motor requirements.
- Environment temperature should fall within $-10\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$.
- Relative humidity cannot be over 90%.

2.4 Anchoring the Machine



Position the machine on a firm cement floor, maintaining, at the rear, a minimum distance of 800 mm from the wall; anchor it to the ground as shown in the diagram, using screws and expansion plugs or tie rods sunk in cement, ensuring that it is sitting level.

2.5 Instructions for Assembly of the Loose Parts and Accessories

Fit the components supplied:

Detail 1 Mount bar-stop rod

Detail 2 Mount and align the roll-supporting arm as per the vise table.

2.6 Deactivation of Machine

- If the sawing machine is to be out of use for a long period, it is advisable to proceed as follows:

- 1) Detach the plug from the electric supply panel
- 2) Loosen blade
- 3) Release the saw bow's counter-balance spring

- 4) Empty the coolant tank
- 5) Carefully clean and grease the machine
- 6) If necessary, cover the machine.

2.7 Dismantling (due to deterioration and/or obsolescence)

General rules

If the machine is to be permanently demolished and/or scrapped, divide the material to be disposed of according to type and composition, as follows:


- 1) Non-composite cast iron or ferrous materials are recyclable raw materials, so they may be taken to an iron foundry for re-smelting after having removed the contents (classified in point 3).
- 2) Electrical components, including the cable and electronic material (magnetic cards, etc.), fall within the category of material classified as being assimilated to urban waste according to the laws of your local, state, or federal government, so they may be set aside for collection by the public waste disposal service;
- 3) Old mineral and synthetic and/or mixed oils, emulsified oils and greases are considered hazardous or special refuse, so they must be collected, transported and disposed of at a special waste disposal service.

NOTE: The standards and legislation concerning refuse is in a constant state of evolution, therefore is subject to changes. The user must keep informed of the regulations at the time of disposal as these may differ from those described above.



3 THE MACHINE'S FUNCTIONAL PARTS

3.1 The Saw Bow

The saw bow is a collection of machine parts consisting of a saw bow, drive members (gears transfer, motor, blade wheel), blade tension system, blade guides, and blade guards. The WP-275DS model also includes a hydraulic cylinder and adjustable counter-balance spring.

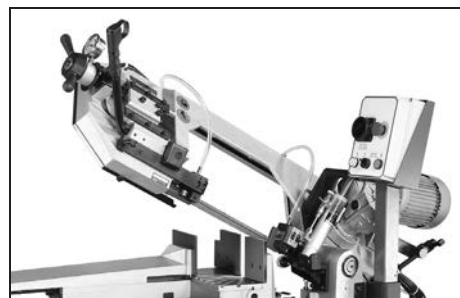


3.2 Controls

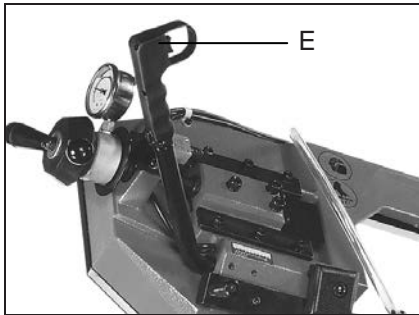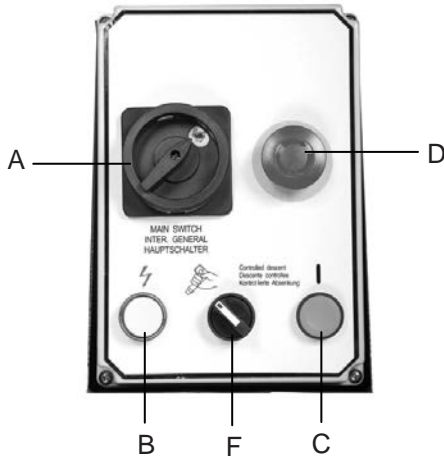

- A. Main Connect Switch
- B. Power Indicator Light
- C. Start Push Button
- D. Emergency Push Button
- E. ON/OFF Trigger and Control Handle
- F. Manual/Hydraulic Selector

3.3 Vise Adjustment

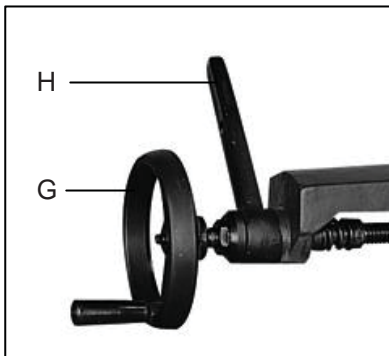

Clamping the Work Piece

- Place the work piece between the vise jaws and have it rest next to the fixed vise jaw.
- Rotate the hand wheel (G) clockwise to close the free vise jaw on to the work piece, and tighten.
- Rotate the hand wheel (G) counter-clockwise to release.
- Lever (H) can be used to rapidly lock and release the work piece by allowing a shallow gap between the vise and work piece. Then rotate lever (H) counter-clockwise to lock and clockwise to release.

3.4 Cutting Angle Adjustment



Cutting at angles

- Angle can be cut up to 60°.
- Unlock lever (I) by pushing it to the left side.
- Rotate the saw bow to the desired angle by following the index on the scale.
- Lock lever (I) by pushing to the right side.

3.5 The Base


The base is a structure supporting the saw bow, the vise, the bar stop, the work piece supporter, pump, swing arm, and the coolant return plate for the support of the material. The base houses the cooling liquid tank.



4 OPERATING AND ADVICE ON USING YOUR BANDSAW

4.1 The Operation Cycle

Before operating the machine, all the main parts of the machine must be set to the optimum conditions.

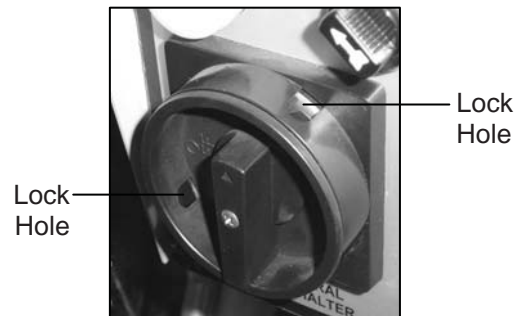

The main connect switch is designed with a lock hole. A lock can be used in the lock hole to prevent operation of the machine for safety or security.

If an emergency situation should be occurred.


- Press the emergency push button (D) down to shut off all functions. To release the

emergency pushbutton rotate the mushroom shaped button in the clock-wise direction. The button will pop up, then the cutting cycle can be restarted.

Operation Procedure:


The WP-275DS is equipped with a hydraulic flow control system and a bow weight adjusting system. This allows the machine to cut both manually and semi-automatically.

A. Manual Operation

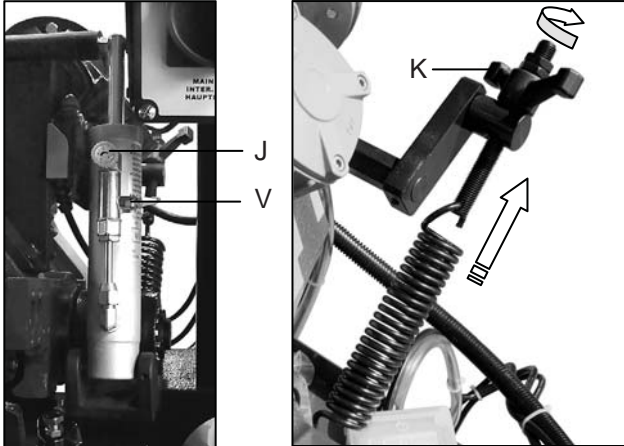

- Reduce the bow weight. Rotate the wing nut (K) clockwise to increase the tension on the spring.
- Load work piece and clamp it properly.
- Turn on main connect switch (A) to the ON position. Check to see that the indicator light (B) is lit.
- Select manual control mode.
- Fully open the hydraulic regulation lever (V).
- Turn the control switch (F) to manual control mode for trigger operation.
- Hold the control handle (E) of the saw bow.
- Fully open the flow control knob (J) by rotating counter-clockwise to the maximum.
- Squeeze the trigger on the control handle (E) to start the blade and lower saw bow to begin cutting.
- When the saw bow reaches the bottom the micro-switch will activate and the blade will stop.
- Keep hold of the control handle to control the return to the start position.
- Close the hydraulic regulation lever (V).
- The cutting operation is complete. Reset the workpiece to continue the next cutting cycle.

B. Semi-auto Cutting Operation

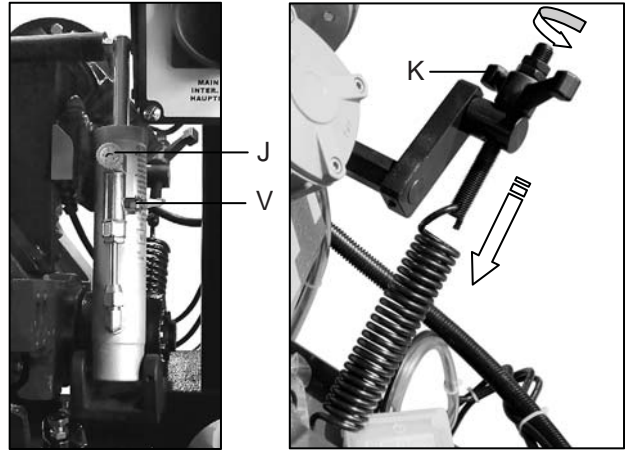

!WARNING!

Failure to fully close the hydraulic flow control knob (J) and locking the hydraulic regulation lever (V) can result in serious injury. The saw bow may drop suddenly when changing the spring tension.

- Close the hydraulic regulation lever (V) by switching it clockwise.
- Increase the bow weight. Rotate the wing nut (K) counter clockwise to reduce the spring tension.
- Load work piece and clamp it properly.
- Turn main connect switch (A) to the ON position. Check to see that the indicator light (B) is lit.
- Select Hydraulic mode on control switch (F).
- Press the start button (C). The coolant system should activate at the same time.
- Open the hydraulic regulation lever (V) by switching it counter-clockwise.
- Slightly turn the hydraulic flow control knob (J) counter-clockwise from 2-3 to control the saw bow's descent rate.
- When the saw bow reaches the bottom the micro-switch will activate and the blade will stop.
- Lift the saw bow to the appropriate height close the hydraulic regulation lever (V) by rotating it clockwise all the way to the end.
- The machine is now ready for the next cutting operation.


If an emergency situation should occur:

- Press the emergency push button (D) down to shut off all functions. To release the emergency push button rotate the mushroom shaped button (D) clock-wise. The button will pop up, then the cutting cycle can be restarted.


4.2 Recommendations for Using the Machine

The machine has been designed to cut metal building materials, with different shapes and profiles, used in workshops, turner's shops and general mechanical structural work.

Only one operator is needed to use the machine, that must stand as shown in the picture.

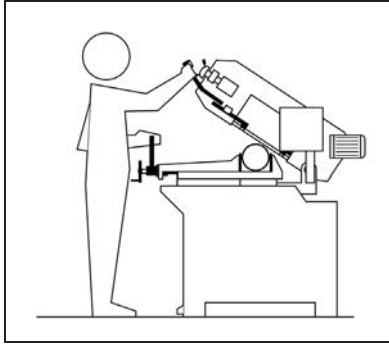

- Before starting each cutting operation, ensure that the part is firmly clamped in the vise and that the end is suitably supported.
- These figures below show examples of suitable clamping of different section bars, bearing in mind the cutting capacities of the machine in order to achieve a good efficiency and blade durability.

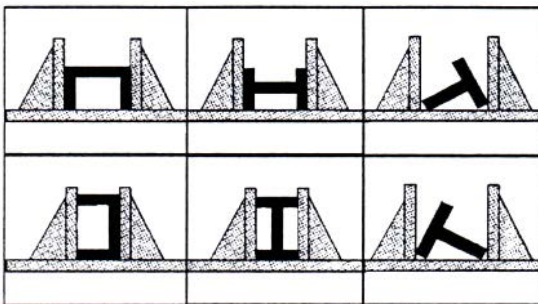


- Do not use blades of a different size from those stated in the machine specifications.
- If the blade gets stuck in the cut, release the running button immediately, switch off the machine, open the vise slowly, remove the part and check that the blade or its teeth are not broken. If they are broken, change the tool.
- Before carrying out any repairs on the machine, consult the dealer.

5 ADJUSTING YOUR MACHINE

5.1 Blade Tension Assembly

Blade tension is important to the proper operation of the saw. Proper blade tension as measured on a Blade Tension Gauge (H). Turn the handle lever (L) to tension the blade tension until the indicator point to the proper tension line as indicator gauge showing.


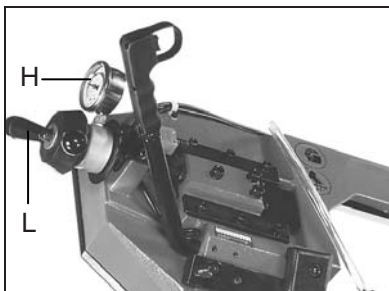


To set the blade tension without the use of a Blade Tension Gauge (H):


- Disconnect the machine from the power source.
- Install blade between wheel and insert blade between bearings on blade guides.
- Tension blade slightly to remove any sag in blade between blade wheels.
- Turn blade tension handle (L) one and three quarter to two revolutions clockwise. To test press the flat side of the blade with your thumb, if moves with 2mm-3mm range then it is set correctly.
- After blade has been completely installed, close covers, connect the power source, and run saw for two to three minutes so blade can seat properly.

5.2 Aligning the Flywheel

The flywheel's alignment may need adjustment to allow the saw blade to track correctly. Poor flywheel alignment can cause damage to the saw blade or to allow the blade to ride off the blade wheels.

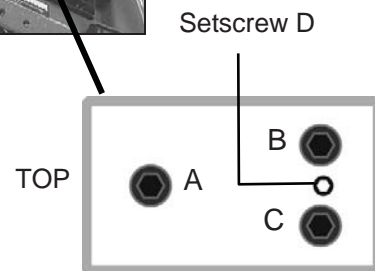


- Raise the saw bow to a usable work height.
- Disconnect the power supply.
- Loosen the Hex nut screws A, B, and C.
- Use an Allen wrench on setscrew D to adjust the tilt of the flywheel.
- Turning the setscrew, D clockwise will tilt flywheel so that the blade will ride closer to the flange.
- Turning the setscrew, D counter-clockwise will tilt the flywheel so that the blade will ride away from the flange. If the blade rides too far then it will come off.
- After the adjustment is finish, fasten the Hex nut screws in this order: A, B, and C.

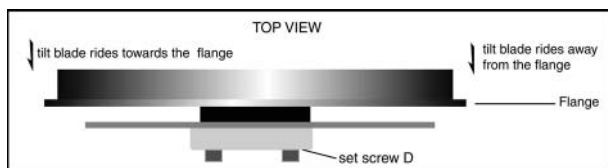


5.3 Checking the Adjustment of the Blade

Use a strip of scrap paper and slide it between the blade and the flywheel while it is running.

- If the paper is cut then the blade is riding too close to the flange. Readjust.
- If the paper folds or creases then the blade is seated properly.
- If you notice that the blade is riding away from the flange, then readjust.

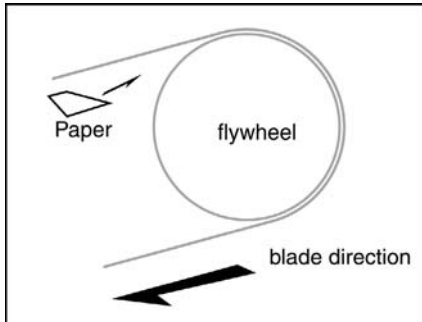


5.4 Adjusting the Blade Guide



- Disconnect the machine from the power source.
- Release the extension bar for the blade guide block. Use the hex socket screw (N) to loosen the clamping block (O).
- Hold the revolving handle (M) and slide the blade guide block to be as close as possible to the material without interfering with the cut.
- Tighten the hex socket screw (N).
- Reconnect the machine to power source.

Blade guide blocks

The blade is guided by means of pads and bearings that are set in place during inspection as per the thickness of the blade with minimum play as shown in the figure. In case the blade needs to be replaced, make sure to always install 0.9mm thick blades for which the blade guide pad and bearings have been adjusted.

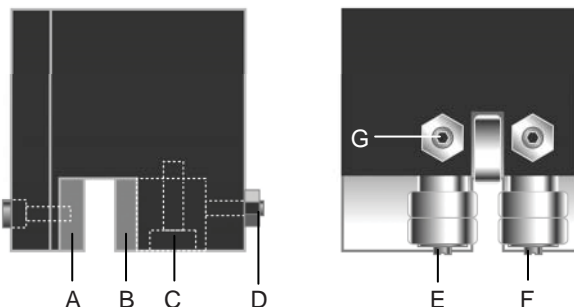


For saw blades with a different thickness, the adjustment should be carried out as follows:
Note: the position for pad (A) and bearing (F) are fixed and cannot be adjusted.

- Loosen screw (C), nut (D), and setscrew (D) to widening the passage between the pads (A and B).
- Loosen the nut (G) and setscrew (G) and rotate the shaft screw (E) with a flat head screwdriver to widen the passage between the bearings (E and F).
- To mount the new blade: adjust the pad (B) to the blade then loosen the setscrew to allow a play of 0.04 mm for the movement of the saw blade. Lock the nut (D), screw (D), and screw (C), Rotate the shaft (E) until the bearings rest against the blade as indicated in the figure and then secure the setscrew (G) and nut (G).

BEFORE PERFORMING THE FOLLOWING OPERATIONS, THE ELECTRIC POWER SUPPLY AND THE POWER CABLE MUST BE COMPLETELY DISCONNECTED.


5.5 Changing the Blade

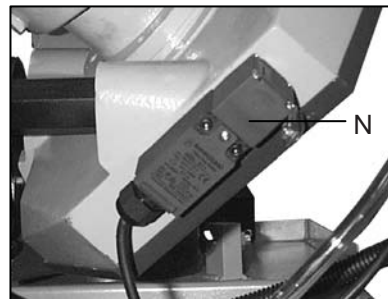

To change the blade:

- Lift the saw bow.
- Loosen the blade with the blade tension hand wheel, remove the mobile blade-guard cover, open the flywheel guards and remove the old blade from the flywheels and the blade guide blocks.
- Assemble the new blade by placing it first between the pads and then on the race of the flywheels, paying particular attention to the cutting direction of the teeth.
- Tension the blade and make sure it perfectly fits inside the seat of the flywheels.
- Assemble the mobile blade-guide end, the flywheel guard, and fasten it with the relative knobs. Check the safety micro-switch (N) is activated otherwise when electricity is applied the machine will not start.

BLADE CUTTING DIRECTION



WARNING: Always assemble blades having dimensions specified in this manual and for which the blade guide heads have been set; otherwise, see chapter on "Description of the operating cycle" in the section Starting-up.

6 ROUTINE AND SPECIAL MAINTENANCE

THE MAINTENANCE JOBS ARE LISTED BELOW, DIVIDED INTO DAILY, WEEKLY, MONTHLY AND SIX-MONTHLY INTERVALS. IF THE FOLLOWING OPERATIONS ARE NEGLECTED, THE RESULT WILL BE PREMATURE WEAR OF THE MACHINE AND POOR PERFORMANCE.

6.1 Daily maintenance

- General cleaning of the machine to remove accumulated shavings.
- Clean the lubricating coolant drain hole to avoid excess fluid.
- Top off the level of lubricating coolant.
- Check blade for wear.
- Rise of saw frame to top position and partial slackening of the blade to avoid useless yield stress.
- Check functionality of the shields and emergency stops.

6.2 Weekly Maintenance

- Thorough cleaning of the machine to remove shavings, especially from the lubricant fluid tank.
- Removal of pump from its housing, cleaning of the suction filter and suction zone.
- Clean the filter of the pump suction head and the suction area.
- Use compressed air to clean the blade guides (guide bearings and drain hole of the lubricating cooling).
- Cleaning flywheel housings and blade sliding surfaces on flywheels.

6.3 Monthly Maintenance

- Check the tightening of the motor flywheel screws.
- Check that the blade guide bearings on the heads are perfect running condition.
- Check the tightening of the screws of the gear motor, pump, and accident protection guarding.

6.4 Six-Monthly Maintenance

- Continuity test of the equipment potential protection circuit.


6.5 Oils for Lubricating Coolant

Considering the vast range of products on the market, the user can choose the one most suited to their own requirements, using as reference the type SHELL LUTEM OIL ECO. THE MINIMUM PERCENTAGE OF OIL DILUTED IN WATER IS 8 - 10 %.

6.6 Oil Disposal

The disposal of these products is controlled by strict regulations. Please see the Chapter on "Machine dimensions Transport - Installation" in the section on *Dismantling*.

6.7 Coolant system

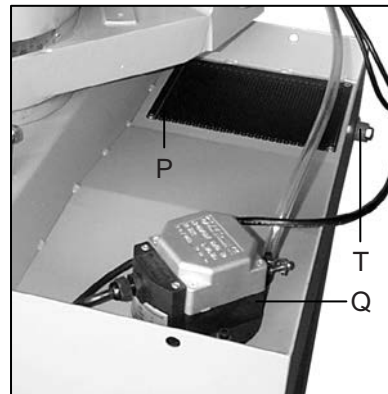

Cleaning the tank

- Use hex wrench to open the plug (T). Allow the coolant to drain-out.
- Remove the grate (P) by loosening the four setscrews.
- Remove the pump (Q) by loosening the four setscrews.
- Use a vacuum cleaner to vacuum chips and debris from the tank.
- Replace the plug (T).
- Thoroughly clean the pump (Q) and replace.
- Fill the tank with coolant to approximately 25mm below the grate (P).
- Replace the grate (P).

6.8 The Gearbox



The gearbox requires periodic changing of oil. The oil must be changed by the first 6 months of a new machine and every year thereafter.

To change the gear box oil

- Disconnect the machine from the power source.
- Raise the saw bow to vertical position.
- Release the drain hole (S) to draw off gear oil by loosening the oil fill bolt (R).
- Replace the drain plug bolt (S) after oil completely flows off.
- Place the saw bow back to horizontal position.
- Fill Gear box with approximately .3 liter of gear oil through the hole of the oil fill bolt (R).




For reference, use SHELL type gear oil or Mobile gear oil #90.

6.9 Special Maintenance

Special maintenance must be conducted by skilled personnel. We advise contacting your nearest dealer and/or importer. Also the reset of protective and safety equipment and devices (of the reducer), the motor, the motor pump, and other electrical components requires special maintenance.

7 TECHNICAL CHARACTERISTICS

7.1 Table of Cutting Capacity and Technical Details

CUTTING CAPACITY			
90°	227mm	220mm	260x110mm
45°	150mm	145mm	200x125mm
60°	90mm	85mm	
45°(L)	110mm	110mm	160x110mm

ELECTRIC MOTOR-BLADE ROTATION	kW	1.1
FLYWHEEL DIAMETER	mm	295
BLADE DIMENSIONS	mm	27x0.9x2460
BLADE SPEED CUTTING	m/min	36 / 72
OPENING VICE	mm	260
SAW FRAME TILTING	°	40
WORKING TABLE HEIGHT	mm	900
MACHINE WEIGHT	kg	315

TYPES OF STEEL						CHARACTERISTICS		
USE	I UNI	D DIN	F AF NOR	GB SB	USA AISI-SAE	Hardness BRINELL HB	Hardness ROCKWELL HRB	R=N/mm²
Construction steels	Fe360	St37	E24	----	----	116	67	360÷480
	Fe430	St44	E28	43	----	148	80	430÷560
	Fe510	St52	E36	50	----	180	88	510÷660
Carbon steels	C20	CK20	XC20	060 A 20	1020	198	93	540÷690
	C40	CK40	XC42H1	060 A 40	1040	198	93	700÷840
	C50	CK50	----	----	1050	202	94	760÷900
	C60	CK60	XC55	060 A 62	1060	202	94	830÷980
Spring steels	50CrV4	50CrV4	50CV4	735 A 50	6150	207	95	1140÷1330
	60SiCr8	60SiCr7	----	----	9262	224	98	1220÷1400
Alloyed steels for hardening and tempering and for nitriding	35CrMo4	34CrMo4	35CD4	708 A 37	4135	220	98	780÷930
	39NiCrMo4	36CrNiMo4	39NCD4	----	9840	228	99	880÷1080
	41CrAlMo7	41CrAlMo7	40CADG12	905 M 39	----	232	100	930÷1130
Alloyed casehardening steels	18NiCrMo7	----	20NCD7	En 325	4320	232	100	760÷1030
	20NiCrMo2	21NiCrMo2	20NCD2	805 H 20	4315	224	98	690÷980
Alloyed for bearings	100Cr6	100Cr6	100C6	534 A 99	52100	207	95	690÷980
Tool steel	52NiCrMoKU	56NiCrMoV7C100K	----	----	----	244	102	800÷1030
	C100KU	C100W1	----	BS 1	S-1	212	96	710÷980
	X210Cr13KU	X210Cr12	Z200C12	BD2-BD3	D6-D3	252	103	820÷1060
	58SiMo8KU	----	Y60SC7	----	S5	244	102	800÷1030
Stainless steels	X12Cr13	4001	----	----	410	202	94	670÷885
	X5CrNi1810	4301	Z5CN18.09	304 C 12	304	202	94	590÷685
	X8CrNi1910	----	----	----	----	202	94	540÷685
	X8CrNiMo1713	4401	Z6CDN17.12	316 S 16	316	202	94	490÷685
Copper alloys Special brass Bronze	Aluminium copper alloy G-CuAl11Fe4Ni4 UNI 5275					220	98	620÷685
	Special manganese/silicon brass G-CuZn36Si1Pb1 UNI5038					140	77	375÷440
	Manganese bronze SAE43 - SAE430					120	69	320÷410
	Phosphor bronze G-CuSn12 UNI 7013/2a					100	56,5	265÷314
Cast iron	Gray pig iron		G25			212	96	245
	Spheroidal graphite cast iron		GS600			232	100	600
	Malleable cast iron		W40-05			222	98	420

8 MATERIAL CLASSIFICATION AND CHOICE OF TOOL

Since the aim is to obtain excellent cutting quality, the various parameters such as hardness of the material, shape and thickness, transverse cutting section of the part to be cut, selection of the type of cutting blade, cutting speed and control of saw frame lowering. These specifications must therefore

be harmoniously combined in a single operating condition according to practical considerations and common sense, so as to achieve an optimum condition that does not require countless operations to prepare the machine when there are many variations in the job to be performed. The various problems that crop up from time to time will be solved more easily if the operator has a good knowledge of these specifications.

8.1 Definition of materials

The table above lists the characteristics of the materials to be cut. So that the correct tools to use, can be chosen.

8.2 Selecting blade

First of all the pitch of the teeth must be chosen, in other words, the number of teeth per inch (25,4 mm) suitable for the material to be cut, according to these criteria:


- Parts with a thin and/or variable section such as profiles, pipes and plate, need close toothing, so that the number of teeth used simultaneously in cutting is from 3 to 6;
- Parts with large transverse sections and solid sections need widely spaced toothing to allow for the greater volume of the shavings and better tooth penetration;
- Parts made of soft material or plastic (light alloys, mild bronze, Teflon, wood, etc.) also require widely spaced toothing;
- Pieces cut in bundles require combo tooth design.

8.3 Teeth pitch

As already stated, this depends on the following factors:


- **Hardness of the material**
- **Dimensions of the section**
- **Wall thickness.**

THICKNESS MM	Z CONTINUOUS TOOTH DESIGN	Z COMBO TOOTH DESIGN
TILL 1.5	14	10/14
FROM 1 TO 2	8	8/12
FROM 2 TO 3	6	6/10
FROM 3 TO 5	6	5/8
FROM 4 TO 6	6	4/6
MORE THAN 6	4	4/6



S = THICKNESS

SOLID Ø OR L MM	Z CONTINUOUS TOOTH DESIGN	Z COMBO TOOTH DESIGN
TILL 30	8	5/8
FROM 30 TO 60	6	4/6
FROM 40 TO 80	4	4/6
MORE THAN 90	3	3/4



Ø = DIAMETER L = WIDTH

8.4 Cutting and advance speed

The cutting speed (m/min) and the advance speed (cm²/min = area traveled by the disk teeth when removing shavings) are limited by the development of heat close to the tips of the teeth.

- The cutting speed is subordinate to the resistance of the material ($R = N/mm^2$, to its hardness (HRC) and to the dimensions of the widest section.
- Too high an advance speed (= lowering of the saw frame) tends to cause the disk to deviate from the ideal cutting path, producing non rectilinear cuts on both the vertical and the horizontal plane.

The best combination of these two parameters can

be seen directly examining the chips.

Long spiral-shaped chips indicate ideal cutting.

Very fine or pulverized chips indicate lack of feed and/or cutting pressure.

Thick and/or blue chips indicate overload of the blade.

8.5 Blade running-in

When cutting for the first time, it is good practice to run in the tool making a series of cuts at a low advance speed (= 30-35 cm²/min on material of average dimensions with respect to the cutting capacity and solid section of normal steel with $R = 410-510 N/mm^2$). Generously spraying the cutting area with lubricating coolant.

8.6 Blade structure

Bi-metal blades are the most commonly used. They consist of a silicon-steel blade backing by a laser welded high speed steel (HSS) cutting edge. The type of stocks are classified in M2, M42, M51 and differ from each other because of their major hardness due to the increasing percentage of Cobalt (Cc) and molybdenum (Mo) contained in the metal alloy

8.7 Blade type

They differ essentially in their constructive characteristics, such as:

- **Shape** and cutting **angle** of tooth
- **Pitch**
- **Set**


Shape and angle of tooth

REGULAR TOOTH: 0° rake and constant pitch.




Most common form for transversal or inclined cutting of solid small and average cross-sections or pipes, in laminated mild steel and gray iron or general metal.

POSITIVE RAKE TOOTH: 9° - 10° positive rake and constant pitch.

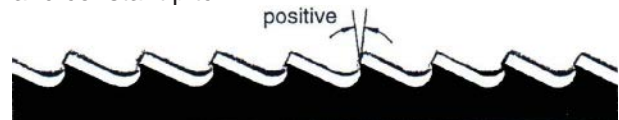


Particular use for crosswise or inclined cuts in solid sections or large pipes, but above all harder materials (highly alloyed and stainless steels, special bronze and forge pig iron).

COMBO TOOTH: pitch varies between teeth and consequently varying teeth size and varying gullet depths. Pitch varies between teeth, which ensures a smoother, quieter cut and longer blade life owing to the lack of vibration.

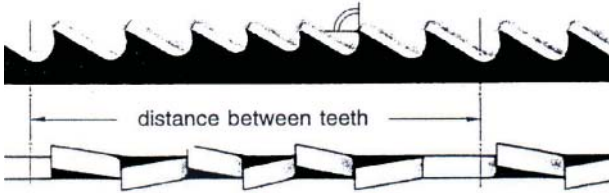

Another advantage offered in the use of this type of blade in the fact that with an only blade it is possible to cut a wide range of different materials in size and type.


COMBO TOOTH: $9^\circ - 10^\circ$ positive rake.

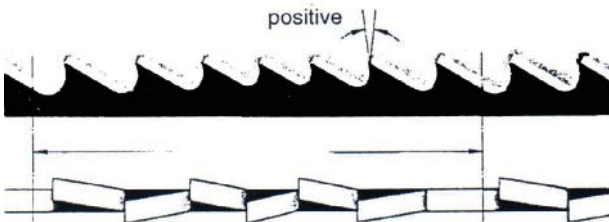


This type of blade is the most suitable for the cutting of section bars and large and thick pipes as well as for the cutting of solid bars at maximum machine capacity. Available pitches: 3-4/4-6.

SETS

Saw teeth bent out of the plane of the saw body, resulting in a wide cut in the workpiece.



REGULAR OR RAKER SET: Cutting teeth right and left, alternated by a straight tooth.



Of general use for materials with dimensions superior to 5 mm. Used for the cutting of steel, castings and hard nonferrous materials.

WAVY SET: Set in smooth waves.



This set is associated with very fine teeth and it is mainly used for the cutting of pipes and thin section bars (from 1 to 3 mm).

ALTERNATE SET (IN GROUPS): Groups of cutting teeth right and left, alternated by a straight tooth.



This set is associated with very fine teeth and it is used for extremely thin materials (less than 1mm).

ALTERNATE SET (INDIVIDUAL TEETH): Cutting teeth right and left.





This set is used for the cutting of nonferrous soft materials, plastics and wood.

9 NOISE TESTS

The test was held under environmental noise levels of 65db. Noise measurements with the machine operating unload was 71db. Noise level during the cutting of mild carbon steel was 73db.

NOTE: with the machine operating, the noise level will vary according to the different materials being processed. The user must therefore assess the intensity and if necessary provide the operators with the necessary personal protection, as required by Law 277/1991.

10 WIRING DIAGRAMS

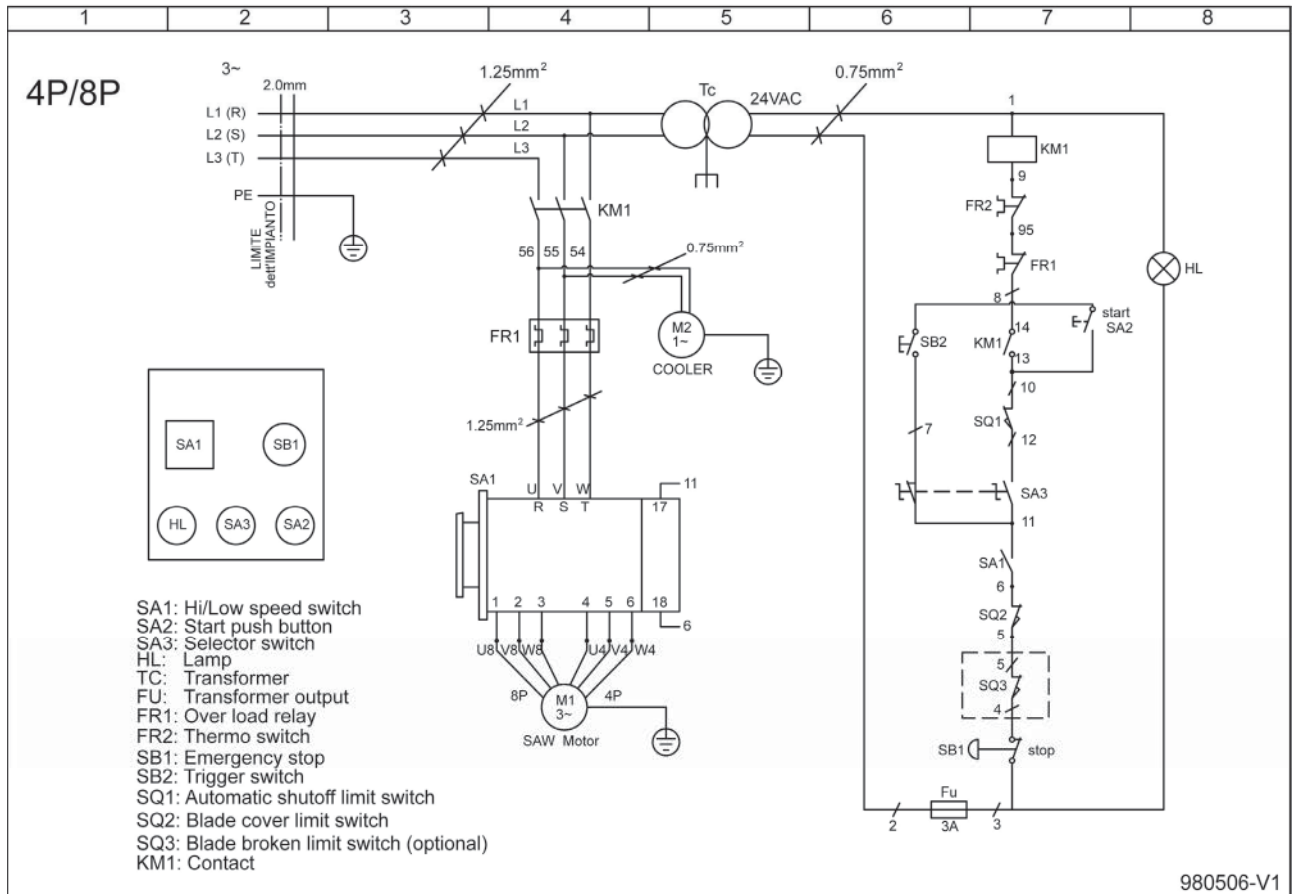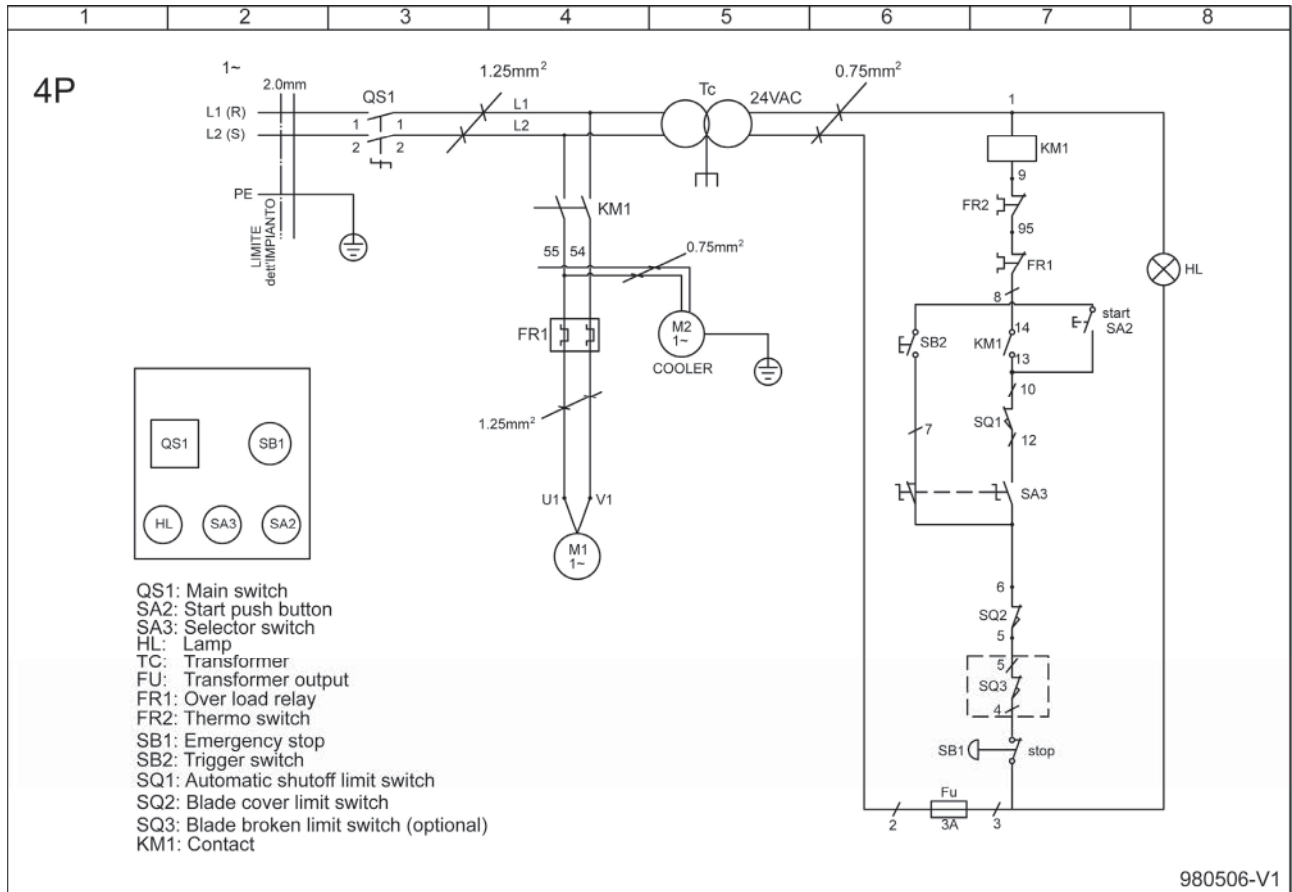

11 TROUBLESHOOTING

This chapter lists the probable faults and malfunctions that could occur while the machine is being used and suggests possible remedies for solving them.


11.1 Blade and cut diagnosis

FAULT

PROBABLE CAUSE

REMEDY

TOOTH BREAKAGE

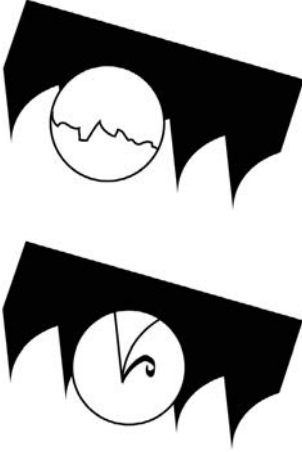

- Too fast advance
- Wrong cutting speed
- Wrong tooth pitch
- Chips sticking onto teeth and in the gullets or material that gums
- Defects on the material or material too hard
- Ineffective gripping of the part in the vise
- The blade gets stuck in the material
- Starting cut on sharp or irregular section bars
- Poor quality blade
- Previously broken tooth left in the cut
- Cutting resumed on a groove made previously
- Vibrations
- Wrong tooth pitch or shape
- Insufficient lubricating, refrigerant, or wrong emulsion
- Teeth positioned in the direction opposite the cutting direction

- Decrease advance, exerting less cutting pressure. Adjust the braking device.
- Change speed and/or type of blade. See chapter on "Material classification and blade selection", in the section *Blade selection table according to cutting and feed speed*.
- Choose a suitable blade. See Chapter "Material classification and blade selection".
- Check for clogging of coolant drain holes on the blade-guide blocks and that flow is plentiful in order to facilitate the removal of chips from the blade.
- Material surfaces can be oxidized or covered with impurities making them, at the beginning of the cut, harder than the blade itself, or have hardened areas or inclusions inside the section due to productive agents used such as casting sand, welding wastes, etc. Avoid cutting these materials or in a situation a cut has to be made use extreme care, cleaning and remove any such impurities as quickly as possible.
- Check the gripping of the part.
- Reduce feed and exert less cutting pressure.
- Pay more attention when you start cutting.
- Use a superior quality blade.
- Accurately remove all the parts left in.
- Make the cut elsewhere, turning the part.
- Check gripping of the part.
- Replace blade with a more suitable one. See "Material classification and blade selection" in the *Blade Types* section. Adjust blade guide pads.
- Check level of liquid in the tank. Increase the flow of lubricating refrigerant, checking that the hole and the liquid outlet pipe are not blocked. Check the emulsion percentage.
- Turn teeth to correct direction.

FAULT

PROBABLE CAUSE

REMEDY


PREMATURE BLADE WEAR



- Faulty running-in of blade
- Teeth positioned in the direction opposite the cutting direction
- Poor quality blade
- Too fast advance
- Wrong cutting speed
- Defects on the material or material too hard
- Insufficient lubricating refrigerant or wrong emulsion

- See "Material classification and blade selection" in the *Blade running-in* section.
- Turn teeth in correct direction.
- Use a superior quality blade.
- Decrease advance, exerting less cutting pressure. Adjust the braking device.
- Change speed and/or type of blade. See chapter on "Material classification and blade selection," in the section *Blade selection table according to cutting and feed speed*.
- Material surfaces can be oxidized or covered with impurities making them, at the beginning of the cut, harder than the blade itself, or have hardened areas or inclusions inside the section due to productive agents used such as casting sand, welding wastes, etc. Avoid cutting these materials or perform cutting with extreme care, cleaning and remove such impurities as quickly as possible.
- Check level of liquid in the tank. Increase the flow of lubricating coolant, checking that the coolant nozzle and pipe are not blocked. Check the emulsion percentage.

BLADE BREAKAGE

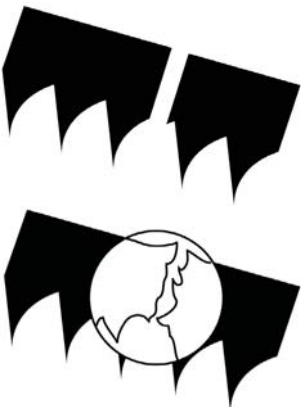


- Faulty welding of blade
- Too fast advance
- Wrong cutting speed
- Wrong tooth pitch
- Ineffective gripping of the part in the vice
- Blade touching material at beginning of cut
- Remedy

- The welding of the blade is of utmost importance. The meeting surfaces must perfectly match and once they are welded they must have no inclusions or bubbles; the welded part must be perfectly smooth and even. They must be evenly thick and have no bulges that can cause dents or instant breakage when sliding between the blade guide pads.
- Decrease advance, exerting less cutting pressure. Adjust the braking device.
- Change speed and/or type of blade.
- See chapter on "Material classification and blade selection", in the section *Blade selection table according to cutting and feed speed*.
- Choose a suitable blade. See Chapter "Material classification and blade selection."
- Check the gripping of the part.
- At the beginning of the cutting process, never lower the saw bow before starting the blade motor.

FAULT

PROBABLE CAUSE

REMEDY

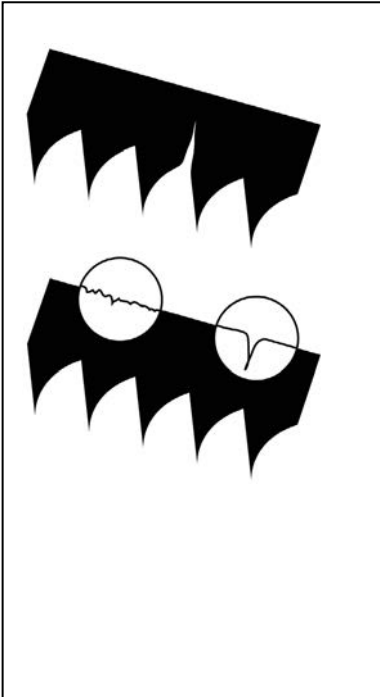

Blade guide pads not regulated or dirty because of lack of maintenance

Blade guide block too far from material to be cut

Improper position of blade on flywheels

Insufficient lubricating coolant or wrong emulsion

Check distance between pads (see "Machine adjustments" in the *Blade Guide Blocks* section): extremely accurate guiding may cause cracks and breakage of the tooth. Use extreme care when cleaning.

Approach head as near as possible to material to be cut so that only the blade section employed in the cut is free, this will prevent deflections that would excessively stress the blade.

The back of blade rubs against the support due to deformed or poorly welded bands (tapered), causing cracks and swelling of the back contour.

Check level of liquid in the tank. Increase the flow of lubricating refrigerant, checking that the hole and the liquid outlet pipe are not blocked. Check the emulsion percentage.

STEAKED OR ETCHED BANDS

Damaged or chipped blade guide pads

Tight or slackened blade guide bearings.

Replace them.

Adjust them (see Chapter "Machine adjustments" in *Blade guide* section).

CUTS OFF THE STRAIGHT

Blade not parallel as to the counter service

Blade not perpendicular due to the excessive play between the guide pads and maladjustment of the blocks

Too fast advance

Worn out blade

Wrong tooth pitch

Check fastenings of the blade guide blocks as to the counter-vice so that they are not too loose and adjust blocks vertically; bring into line the position of the degrees and if necessary adjust the stop screws of the degree cuts.

Check and vertically re-adjust the blade guide blocks; reset proper side guide play (see Chapter "Machine adjustments" In *Blade guide* section).

Decrease advance, exerting less cutting pressure. Adjust the braking device.

Approach it as near as possible to material to be cut so that only the blade section employed in the cut is free, this will prevent deflections that would excessively stress the blade.

Replace it. Blade with major density of teeth is being used, try using one with less teeth (see Chapter "Material classification and blade selection" in the *Blade Types* section).

FAULT

PROBABLE CAUSE

REMEDY

--


Broken teeth
Insufficient lubricating refrigerant or wrong emulsion

Irregular work of the blade due to the lack of teeth can cause deflection in the cut; check blade and if necessary replace it.
Check level of liquid in the tank. Increase the flow of lubricating coolant, checking that the hole and the liquid outlet pipe are not blocked. Check the emulsion <i>percentage</i> .

FAULTY CUT

Worn out flywheels Flywheel housing full of chips
--

The support and guide flange of the band are so worn out that they cannot ensure the alignment of the blade, causing faulty cutting; blade rolling and drawing tracks can have become tapered. Replace them. Clean with compressed air.

STREAKED CUTTING SURFACE


Too fast advance
Poor quality blade
Worn out blade or with chipped and/or broken teeth
Wrong tooth pitch
Blade guide block too far from material to be cut
Insufficient lubricating coolant or wrong emulsion

Decrease advance, exerting less cutting pressure. Adjust the braking device.
Use a superior quality blade.
Replace it.
Blade used probably has too large teeth, use one with more teeth (see " Material classification and blade selection " in the <i>Blade Types</i> section).
Approach it as near as possible to material to be cut so that only the blade section employed in the cut is free, this will prevent deflections that would excessively stress the blade.
Check level of liquid in the tank. Increase the flow of lubricating coolant, checking that the hole and the liquid outlet pipe are not blocked. Check the emulsion <i>percentage</i> .

NOISE ON GUIDE BLOCKS

Chipped bearings Worn out or damaged pads
--

Dirt and/or chips between blade and guide bearings. Replace them. Replace them.
--

PART LIST

Part No.	Description	Size No.	Q'ty	Part No.	Description	Size No.	Q'ty
1	Base Cover		2	52	Nut	M12	1
2	Base (Left Part)		1	53	Handle		1
3	Nut	M8	4	54	Scale		1
4	Washer	M8	4	55	Rivet	2.3x4	2
5	Hex. Cap Bolt	M8x16	4	56	Hex. Cap Bolt	M10x35	1
9	Base (Right Part)		1	57	Shaft		1
10	Washer	M10	4	58	Hex. Cap Bolt	M10x45	1
11	Hex. Cap Bolt	M10x20	4	59	Nut	M10	2
12	Coolant and Chip Tray		1	60	Ball Bearing	32007	2
12-1	Front Coolant Tray		1	61	Anti-Dust Cover	M35	2
12-2	Hex. Socket Cap Screw	M6x8	2	62	Star Washer	M35	1
13	Washer	M10	4	63	Jam Nut	M35	1
14	Hex. Cap Bolt	M10x20	4	64	Spring Hook		1
19	Pump		1	65	Nut	M8	1
20	Hose Clamp	13mm	1	66	Pin		1
21	Hose	5/16"x130cm	1	67	Hollow Pin	Ø 2.5x16	1
22	Hex. Socket Cap Screw	M6x25	2	68	Spring		1
23	Washer	M6	2	69	Bushing		1
24	Hex. Cap Bolt	M12x40	2	70	Bracket		1
25	Nut	M12	2	71	Spring Washer	M8	2
26	Filter Net		1	72	Hex. Socket Cap Screw	M8x25	2
27	Round Head Screw	M5x10	4	73	Knob		1
29	Disk		1	74	Supporting Bracket		1
30	Hex. Socket Cap Screw	M8x30	4	75	Set Screw	M6x12	1
31	Spring Washer	M8	4	76	Hex. Socket Cap Screw	M8x25	4
32	Oil Seal		1	77	Spring Washer	M8	4
33	Roller Stand		1	78	Shaft		1
34	Spring Washer	M8	2	79A	Setting Bracket		1
35	Hex. Socket Cap Screw	M8x20	2	80	Spring Washer	M8	4
36	Roller		1	81	Hex. Socket Cap Screw	M8x20	4
37	Roller Shaft		1	82	Hex. Socket Cap Screw	M10x25	2
38	Hex. Cap Bolt	M12x25	2	83	Spring Washer	M10	2
39	Spring Washer	M12	2	84P	Control Bracket		1
40	Washer	M12	2	85	Round Head Screw	M5x10	8
41	Track		1	86P	PVC Panel		1
42	Nut	M8	2	87	Emergency Switch		1
43	Washer	M8	2	88	Start Button		1
44	Hex. Socket Cap Screw	M8x40	2	89	Main Connect Switch	3PH	1
45	Swivel Arm		1	89-1	0-1 Power Switch (not shown)	1PH	1
46	Shaft		1	90	Manual / Auto Selector		1
47	Shaft Nut		1	91	Power Indicator Light		1
48	Spring Washer	M10	1	95P	Plastic Box		1
49	Hex. Socket Cap Screw	M10x35	1	98	Transformer		1
50	Set Screw	M10x16	1	100	Fuse Seat		1
51	Locking Lever		1	101	Overload Relay		1

981110

PART LIST


Part No.	Description	Size No.	Q'ty	Part No.	Description	Size No.	Q'ty
102	Magnetic Connector		1	150	Saw Arm		1
107	Table		1	151	Limit Switch		1
107-1	Set Screw	M8x10	1	151-1	Switch Pin		1
108	Changeable Plate		1	152	Hex. Socket Cap Screw	M4x35	2
109	Hex. Socket Cap Screw	M8x16	4	153	Hose	5/16	1
110	Pointer		1	154	Hose Clamp	13mm	2
111	Hex. Socket Cap Screw	M5x8	1	155	Coolant Switch		1
112	Bar-Stop-Rod		1	156	Hex. Socket Cap Screw	M5x30	2
113	Bar-Stop		1	157	Pipe Fitting Seat		1
114	Handle	M10x35	1	158	Pipe Fitting		2
115	Scale		1	159	Hose	5/16	1
116	Rivet		3	160	Spring Washer	M10	4
117	Set Screw	M6x12	1	161	Hex. Socket Cap Screw	M10x40	4
118	No-Burr Jaw		1	162	Drive Flywheel		1
119	Hex. Socket Cap Screw	M6x15	2	163	Washer		1
120	Counter Vise Jaw		1	164	Spring Washer	M10	1
121	Hex. Socket Cap Screw	M6x15	2	165	Hex. Cap Bolt	M10x25	1
122	Flat Head Machine Screw	M6x15	2	166	Hex. Socket Cap Screw	M5x8	1
123	Vise Jaw		1	167	Shaft		1
124	Vise		1	168	Ball Bearing	6006	2
125	Hex. Socket Cap Screw	M6x120	2	169	Bushing		2
126	Set Screw	M8x10	1	170	Idle Flywheel		1
127	Lead Screw		1	171	Washer	M10	1
128	Key	5x5x15	1	172	Spring Washer	M10	1
129	Spring		1	173	Hex. Cap Bolt	M10x25	1
130	Bushing		1	174	Blade		1
131	Lock Handle		1	175	Blade Cover		1
132	Bearing Bushing		1	176	Knob Bolt	M6x10	4
133	Ball Bearing	51104	1	177	Round Head Screw	M4x8	2
134	Nut		1	178	Nut	M4	2
135	Set Screw	M5x5	1	179	Tension Shaft		1
136	Set Screw	M8x10	1	180	Special Spring Washer		8
137	Hand Wheel	6-1/2"	1	181	Plate		1
138	Vise Seat		1	182	Blade Tension Gauge		1
139	Vise Setting Plate		1	183	Thrust Bearing	51103	1
140	Hex. Socket Cap Screw	M10x30	2	184	Handle Wheel		1
141	Setting Washer		1	185	Handle		2
142	Lock Lever Device		1	186	Trigger Switch		1
143	Handle	1/2"	1	187	Nut	M16	1
144	Setting Plate		1	188	Pipe		1
145	Spring Washer	M8	1	189	Set Screw	M8x10	2
146	Ball Bearing	608ZZ	1	190	Plate		1
147	Hex. Socket Cap Screw	M8x16	1	191	Hex. Socket Cap Screw	M6x12	2
148	Hex. Socket Cap Screw	M8x20	2	192	Limit Switch		1
149	Spring Washer	M8	2	193	Hex. Socket Cap Screw	M4x25	2


981110


PART LIST


Part No.	Description	Size No.	Q'ty	Part No.	Description	Size No.	Q'ty
194	Slide Bracket		1	239	Hex. Socket Cap Screw	M8x20	2
195	Nut	M16	1	240	Hex. Socket Cap Screw	M6x8	1
196	Spring Washer	M10	3	241	Handle	M6x60	1
197	Hex. Socket Cap Screw	M10x45	3	242	Guide Bracket		1
198	Set Screw	M10x25	1	243	Nozzle		1
199	Cover Plate		1	244	Bolt		2
200	Hex. Socket Cap Screw	M6x8	2	245	Hex. Socket Cap Screw	M6x8	1
201	Setting Bracket		1	246	Blade Guard		1
202	Hex. Socket Cap Screw	M12x50	1	247	Set Screw	M6x12	2
203	Gib		2	248	Nut	M6	2
204	Hex. Socket Cap Screw	M8x20	6	249	Centric Shaft		2
205	Spring Washer	M8	6	250	Ball Bearing	608ZZ	8
206	Hex. Cap Bolt	M6x12	2	251	E-Ring	E-7	8
207	Washer	M6	2	252	Blade Guide		2
208	Spring Washer	M10	4	253	Hex. Socket Cap Screw	M6x25	2
209	Hex. Socket Cap Screw	M10x30	4	254	Eccentric Shaft		2
210	Set Screw	M6x12	4	255	Ball Bearing	608ZZ	2
211	Gear Box		1	256	Guide Bracket		1
212	Key	8x8x35	1	257	Pipe Fitting		1
213	Vent Screw		1	258	Hex. Socket Cap Screw	M6x8	2
214	Hex. Cap Bolt	M8x30	4	259	Blade Guide		2
215	Spring Washer	M8	4	260	Blade Guard		1
216	Key	6x6x30	1	261	Hex. Socket Cap Screw	M6x8	2
217	Motor		1	262	Hex. Socket Cap Screw	M8x20	2
218	Hydraulic Cylinder Post		1	263	Brush		1
219	Spring Washer	M8	4	264	Brush Clamp		1
220	Hex. Socket Cap Screw	M8x25	4	265	Set Screw	M5x5	1
221	Hydraulic Cylinder		1	266	Set Bushing		1
222	Nut	M10	1	267	Hex. Cap Screw	M6x12	2
223	Hex. Socket Cap Screw	M10x40	1	268	Washer	M6	2
224	Adjusting Bracket		1				
225	Hex. Socket Cap Screw	M6x8	2				
226	Limit Switch		1				
227	Round Head Screw	M5x10	2				
228	Spring Shaft		1				
229	Setting Plate		1				
230	Set Screw	M8x10	3				
231	Spring		1				
232	Adjustable Shaft		1				
233	Bushing		1				
234	Washer	M16	1				
235	Handle		1				
236	Nut	M16	2				
237	Blade Guide Movable Rod		1				
238	Set Screw	M6x12	4				

981110

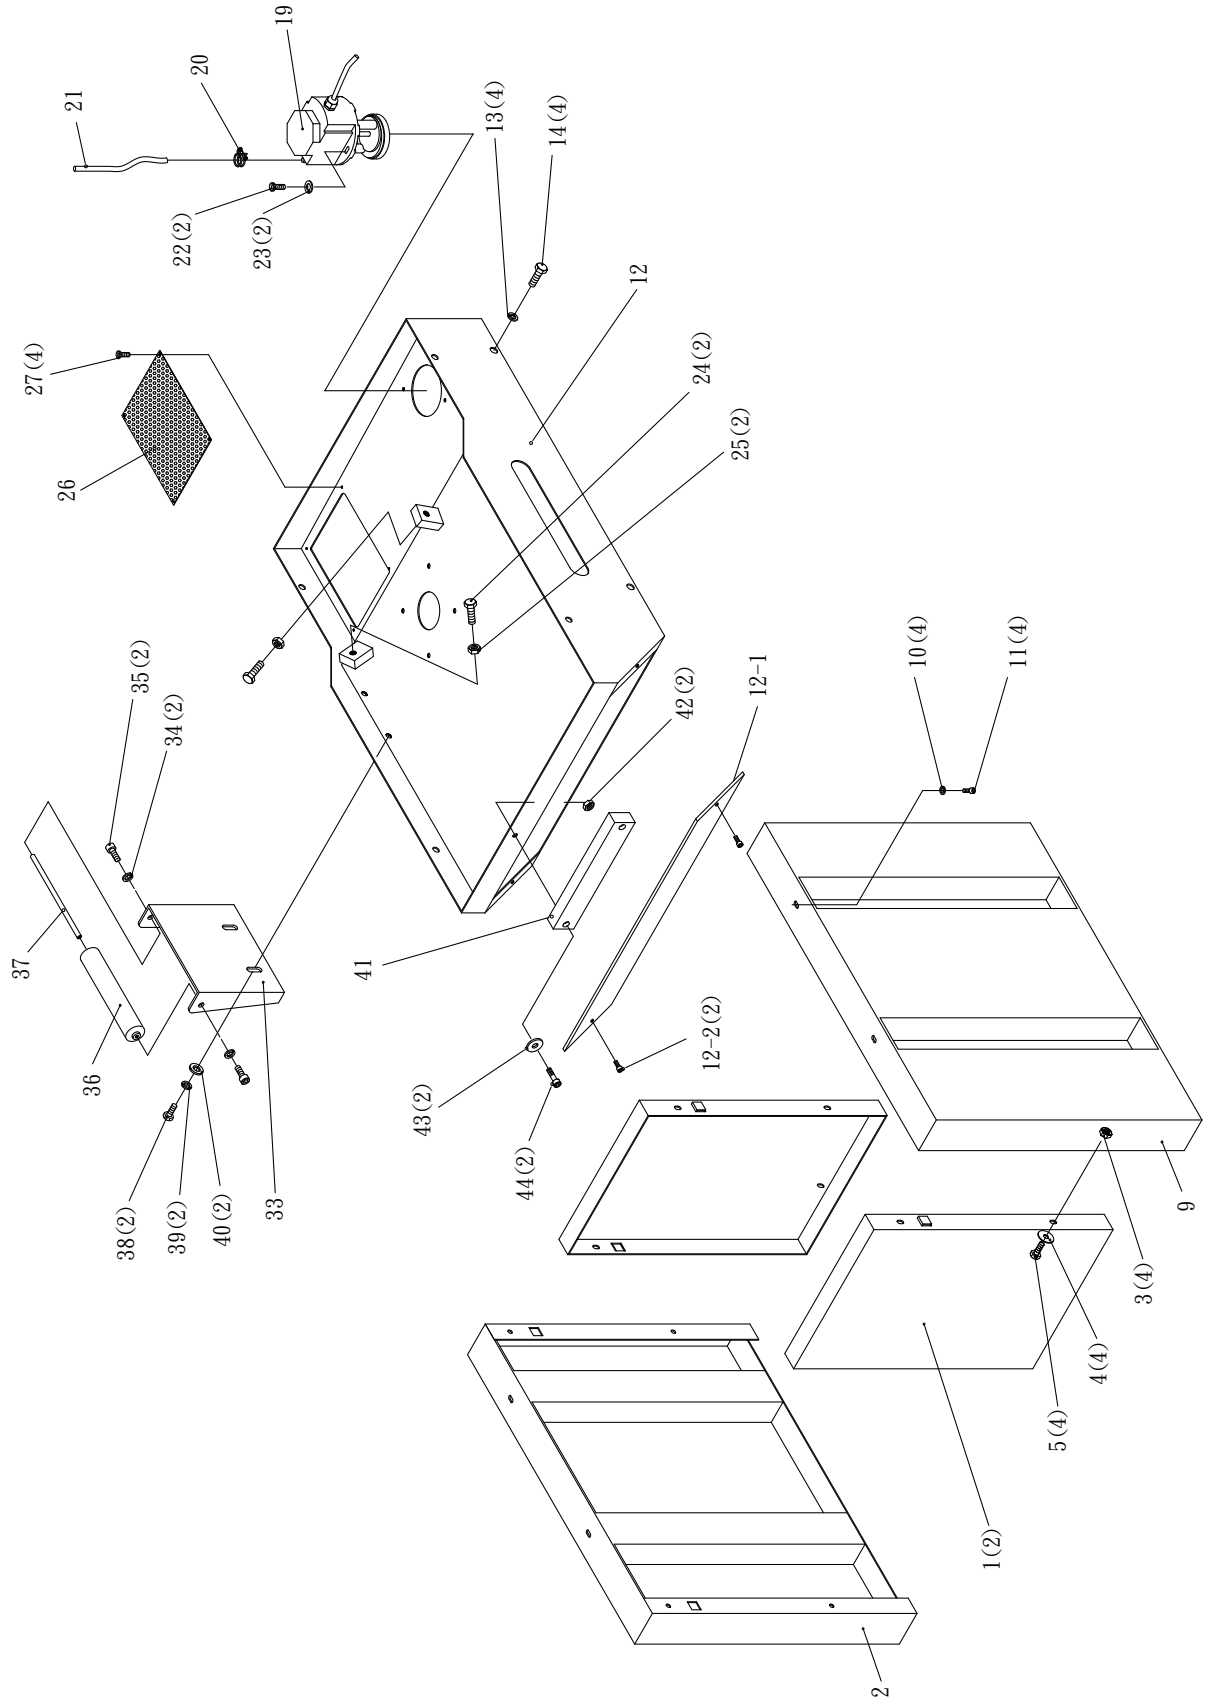

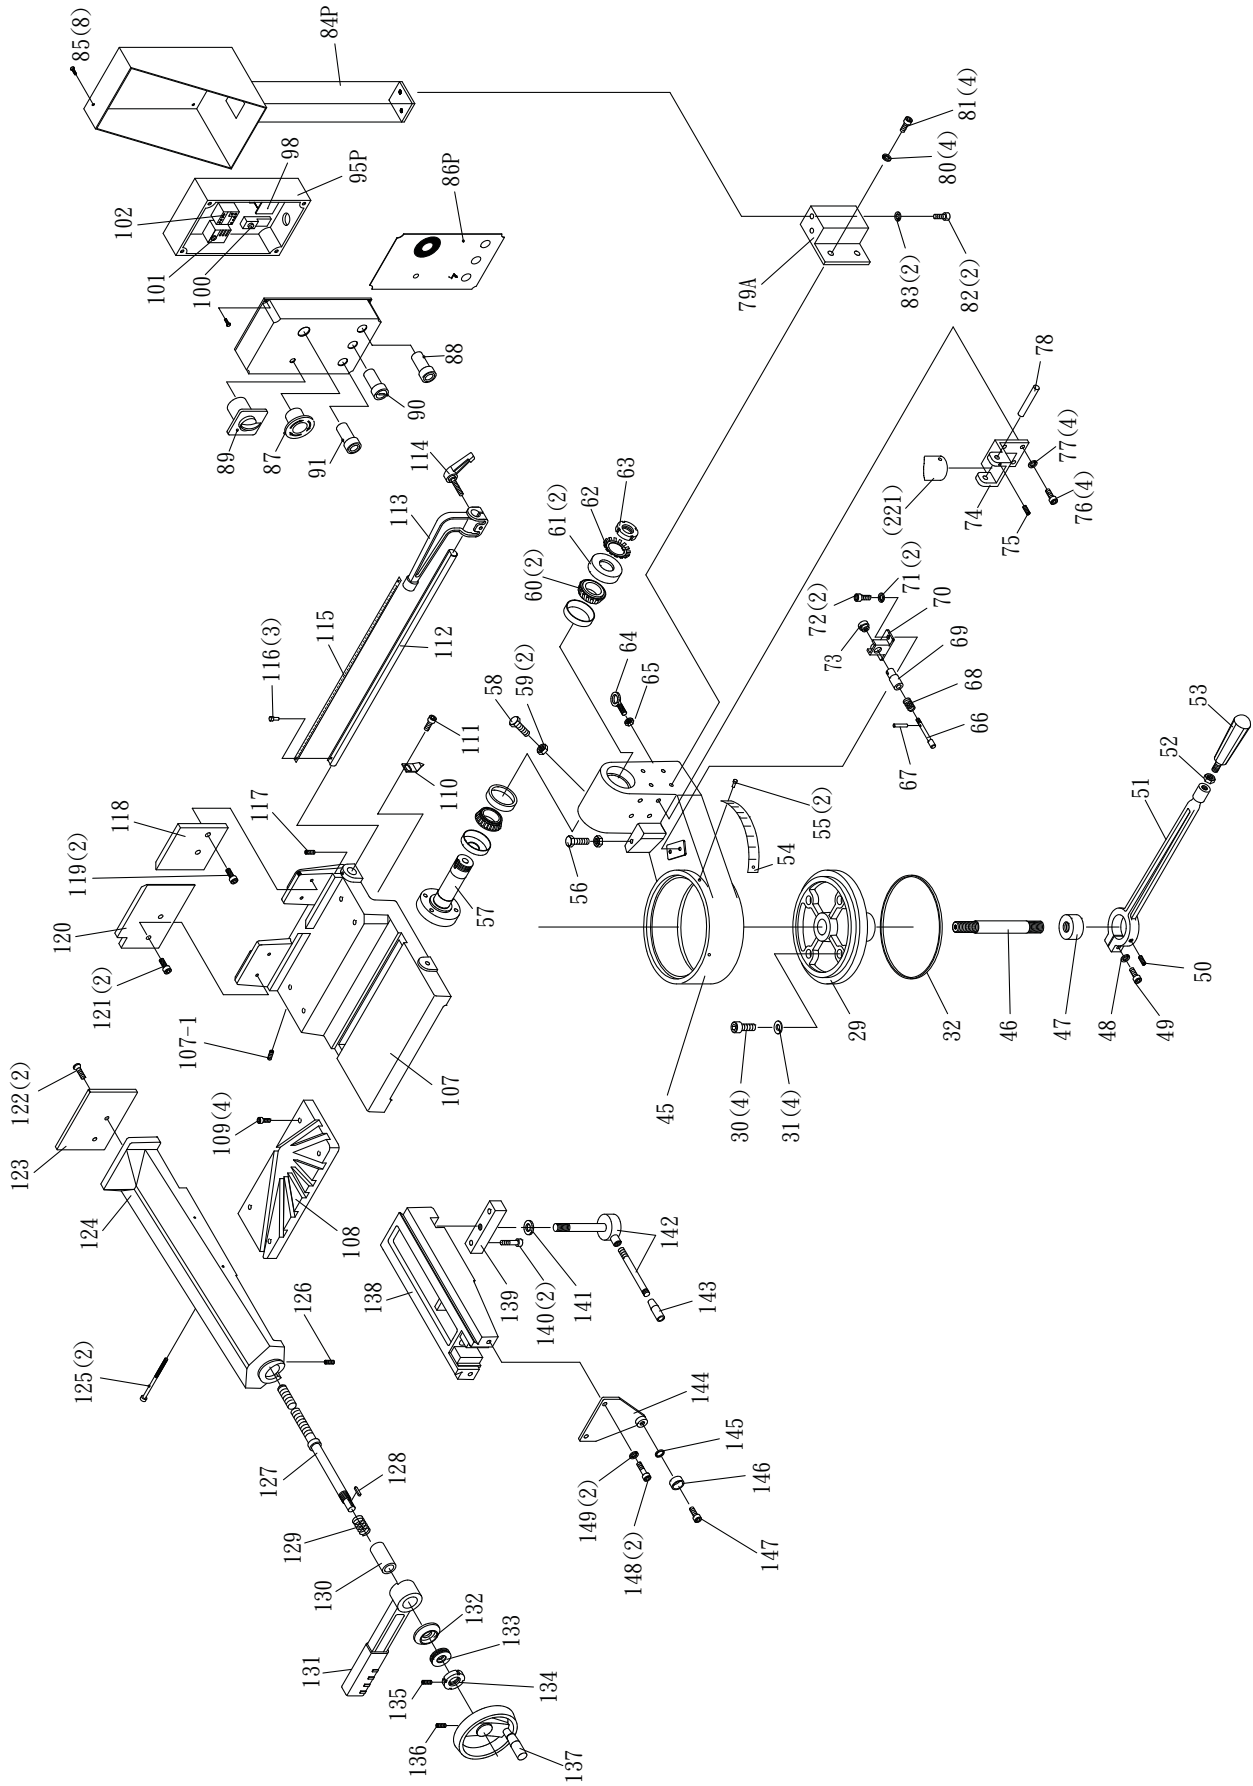

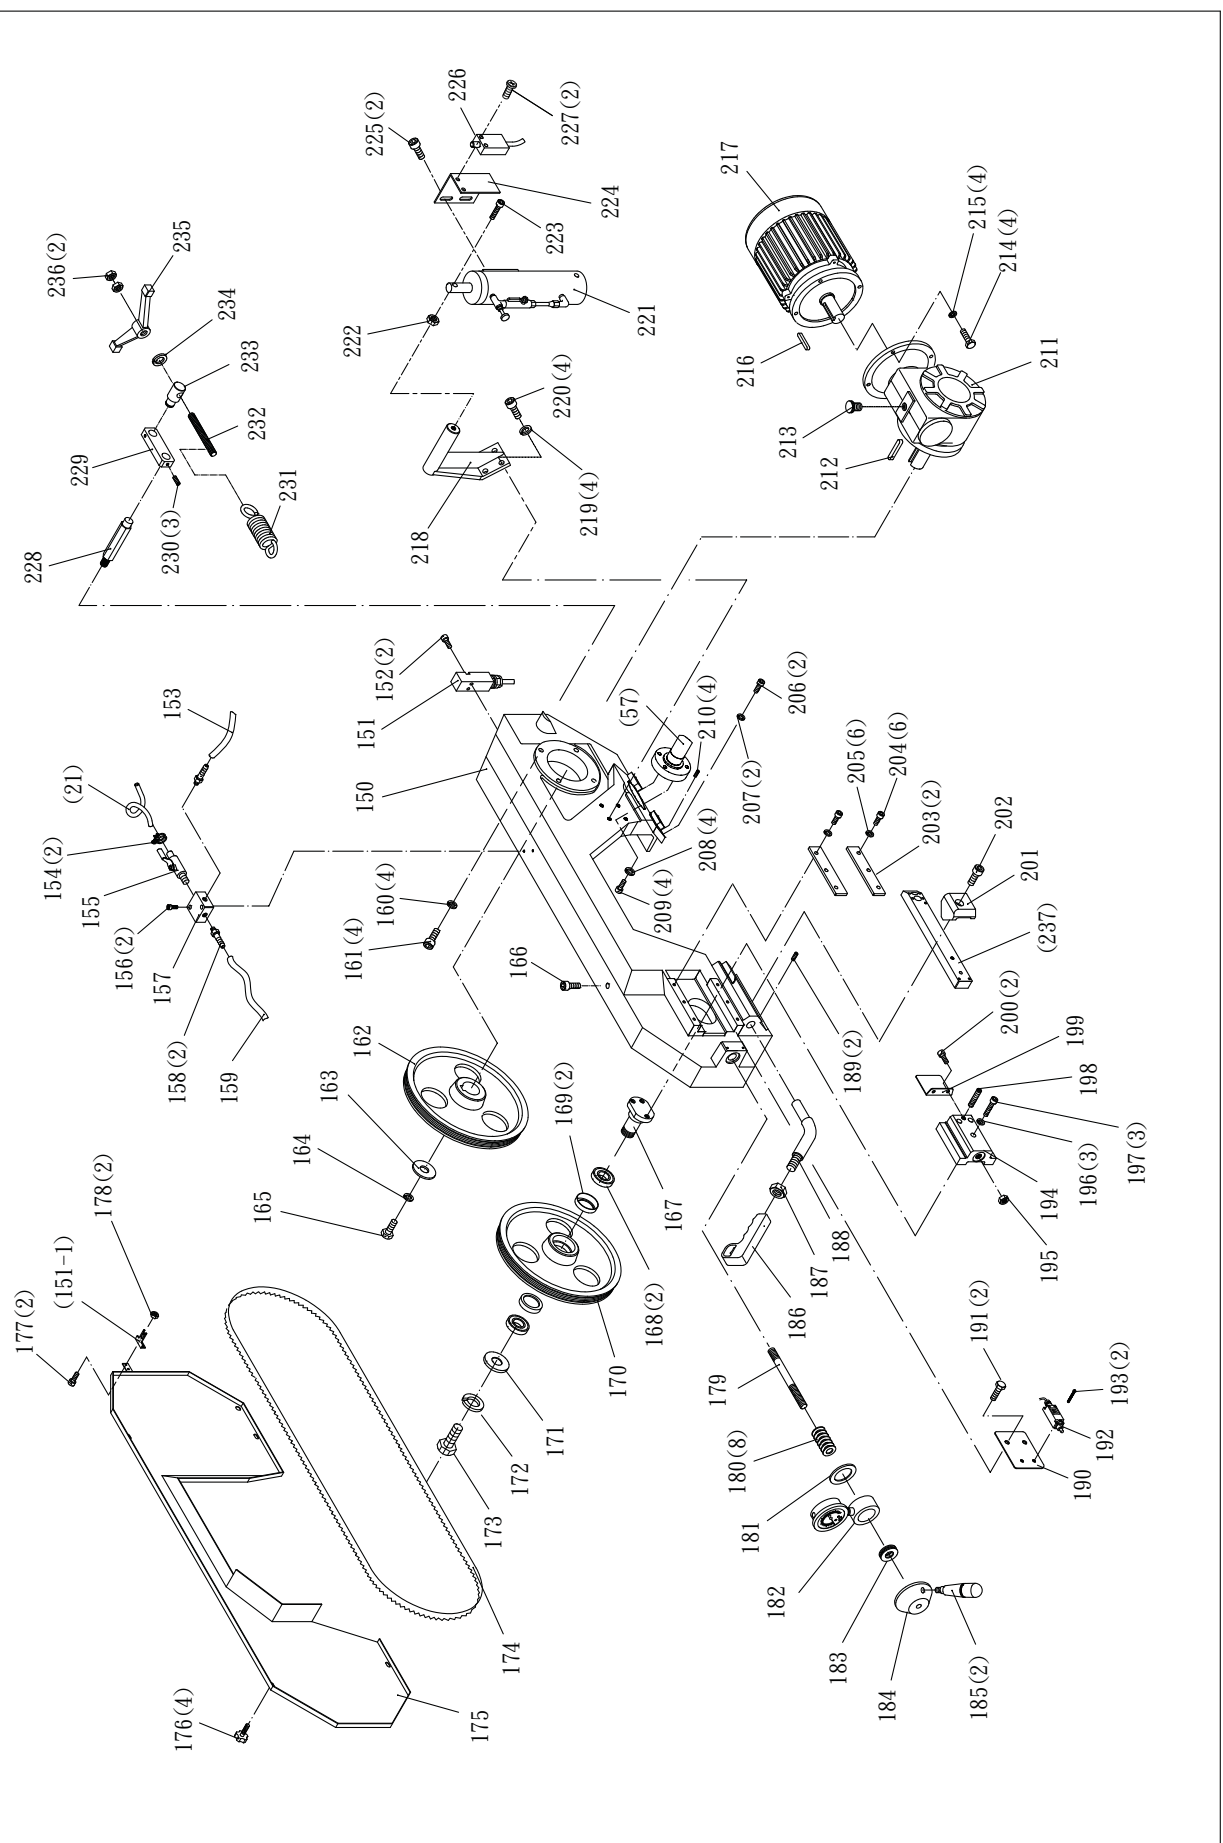

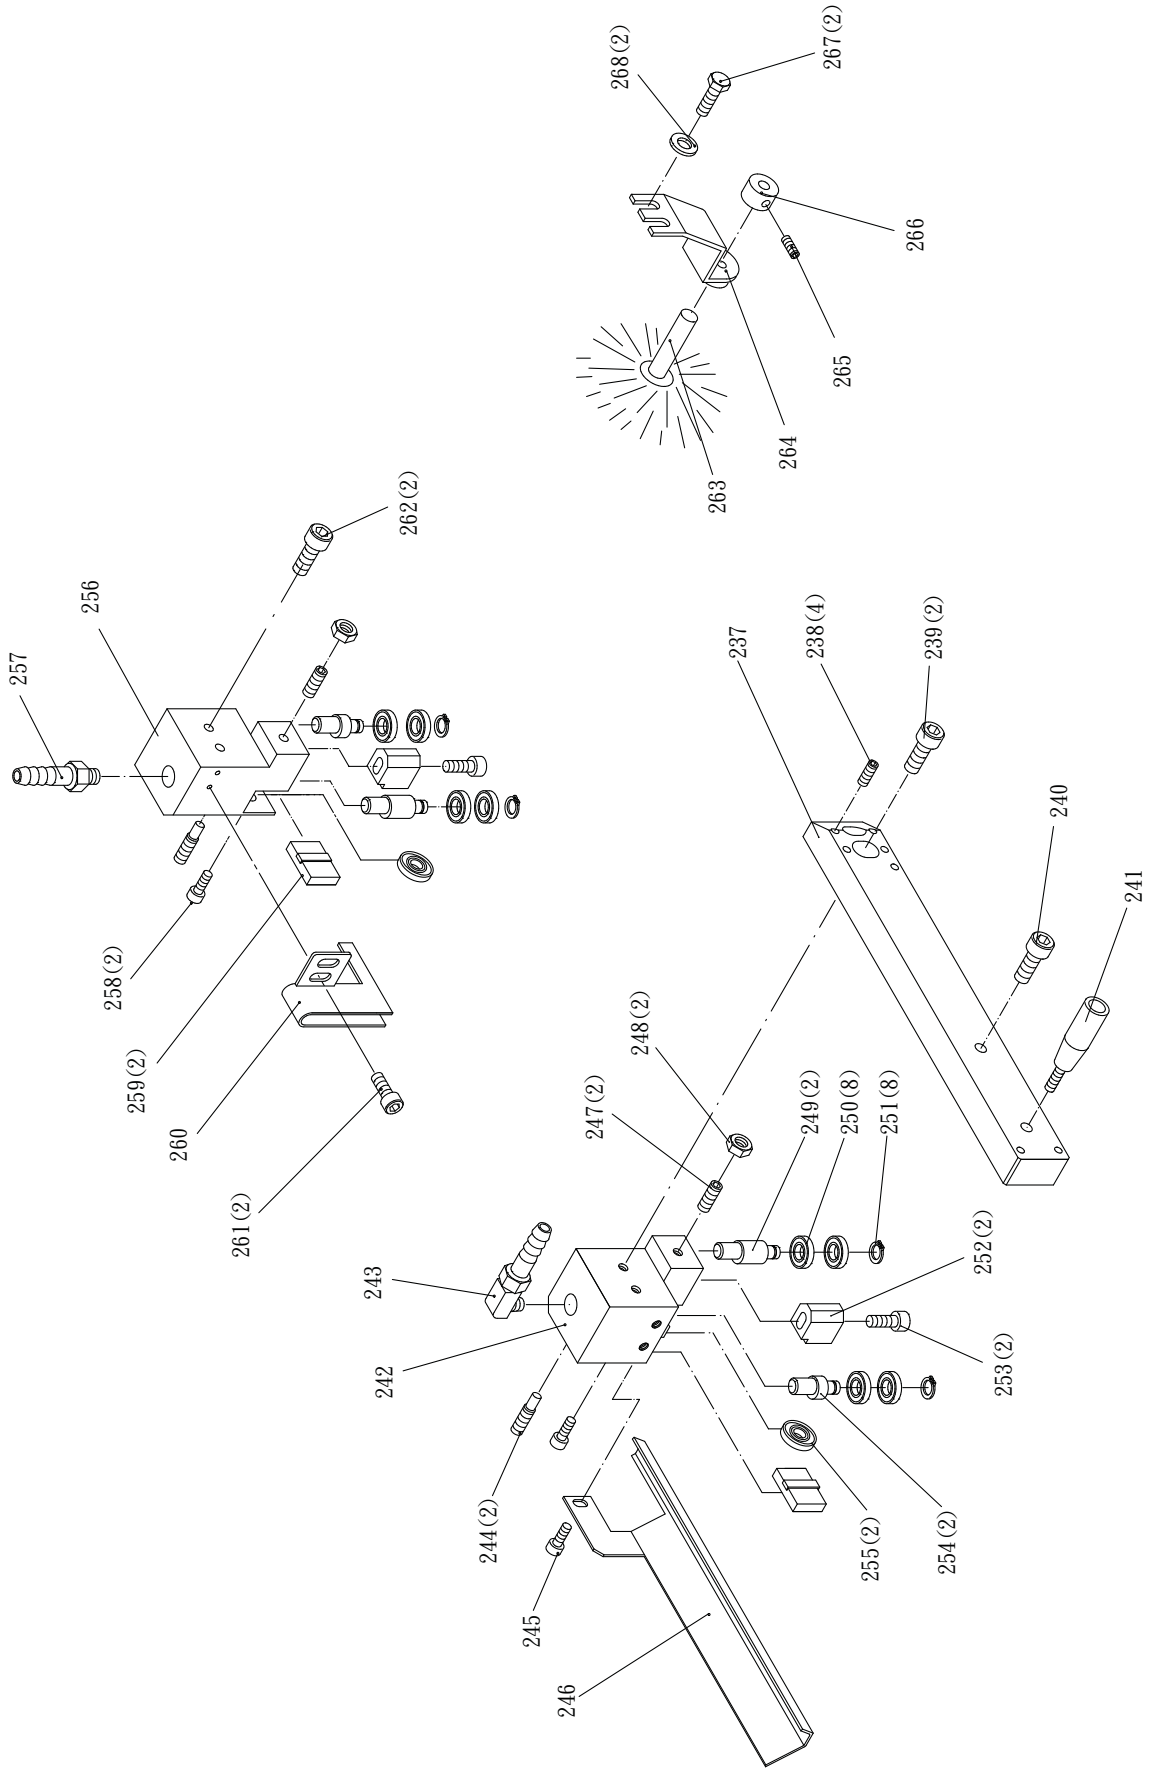

EC DECLARATION OF CONFORMITY

according to the following EC Directive
- Machinery Directive :2006/42/EC.
- EMC Directive :2004/108/EC.
- LVD Directive :2006/95/EC.
- RoHs Directive :2002/95/EC

The undersigned, Kuo Chuan-Lin, representing Way Train Industries Co., Ltd., No. 1008, Hou Chuang Rd., Pei Tun Chu, Taichung, Taiwan, R.O.C., manufacturer, declares that the machine described hereafter:

Bandsaw for metalworking,

Model: WP-275DS

Provided that it is used and maintained in accordance with the generally accepted codes of good practice and the recommendations of the instructions manual, meets the essential safety and health requirements of the Machinery Directive, EMC directive, LVD Directive, and RoHs Directive.

For the most specific risks of this machine, safety and compliance with the essential requirements of the Directive has been based on elements of :

- The European Standard EN 60204-1: 2007–Safety for the electrical equipment of machinery.
- The European Standard EN 55011: 1998+A1:2004 + A2:2007 - Limits and methods of measurement of radio interference characteristics of industrial electrical device.
- The European Standard IEC 61000-6-2: 2005 – Electromagnetic compatibility (EMC) – Part 6.2 – Generic standards – Immunity for industrial environments.
- The European Standard IEC 61000-6-4: 2001+A11/2004 – Electromagnetic compatibility (EMC) – Part 6.4 – Generic standards – Emission standards for industrial environments.
- The European Standard EN ISO 12100-1:2003 ; Safety of machinery – Basic concepts, general principles for design – Part 1: Basic terminology, methodology.
- The European Standard EN ISO 12100-2:2003; Safety of machinery - Basic concepts, general principles for design - Part 2: Technical Principles.
- The European Standard EN ISO 14121-1 & 2: 2003; Safety of Machinery - Risk Assessment.
- The International Standard ISO 13852: 2003; Safety of machinery - Safety distances to prevent danger zones being reached by the upper limbs.
- EN 13898: 2003 - Machine tools – Safety – Sawing machines for cold metal.

Date: _____.

Signature: Kuo-Chuan Lin.

Qualification : General Manager.